



Customer Service

support@ruffwear.com
888-783-3932
2843 NW Lolo Drive
Bend, OR, USA 97701

ENG

RUFFWEAR LOAD UP™ HARNESS

Dog Vehicle Restraint Harness

SAFETY INFORMATION & INSTRUCTIONS FOR USE



Please retain this booklet for future reference.

WARNING

For use securing a dog in the rear passenger seat of vehicle only. No dog restraint can guarantee protection from injury in every scenario, but proper use helps reduce the risk of serious injury or death. Never leave dog unattended. Vehicle seat belt system **MUST** hold dog restraint securely. Not all vehicle seat belts can be used with a dog restraint. The restraint harness must be held securely at all times by a belt that will not change length while driving. Before using this product, read and understand all instructions and warnings that accompany it and familiarize yourself with its proper use, capabilities, and limitations.



Failure to read and follow these warnings can result in severe injury or death to you or your dog.

WARNING

DOG VEHICLE RESTRAINT HARNESS

Before using the Load Up™ Harness:

- Read the above warning
- Read this instruction booklet carefully and completely
- Check to make sure the harness is the proper size for the dog
- Test the harness fit in a safe situation before using in a vehicle

SAFETY TESTING

The Load Up Harness was put through stringent safety tests including dynamic crash testing and static tensile testing of all critical safety components. This harness has been crash tested up to 75lbs (34kg), in the same frontal crash tests that ensure the effectiveness of child safety restraints, Federal Motor Vehicle Safety Standard No. 213. The dynamic test was performed with MGA Research Corporation, a National Highway Traffic Safety Administration. A representative from Center for Pet Safety, a non-profit research and advocacy organization dedicated to companion animal and consumer safety, was on-site to administer and witness the testing.


The results of the test can viewed at:

www.ruffwear.com/Load-Up-Harness

PRECAUTIONS


- Inspect the harness for signs of wear or any damaged components prior to each use
- Never allow your dog to chew on any part of the harness
- Retire the harness if there is any doubt to its strength-rated functionality
- Never leave dog unattended in vehicle

HARNESS FEATURES

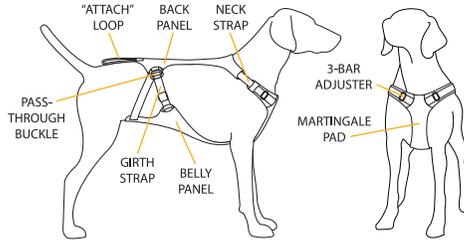

HOW TO SIZE A DOG FOR THE LOAD UP™ HARNESS

Proper fit is critical for safe, secure use of the Load Up™ Harness. Use the Sizing Chart to determine the correct size.



Dog Girth
Measurement around widest part of rib cage


SIZING CHART (GIRTH)

XXS	13-17 in	33-43 cm
XS	17-22 in	43-56 cm
S	22-27 in	56-69 cm
M	27-32 in	69-81 cm
L/XL	32-42 in	81-107 cm


HOW TO PUT THE LOAD UP™ HARNESS ON A DOG

For step-by-step video instructions, please visit www.ruffwear.com/Load-Up-Harness



STEP 1: Loosen straps

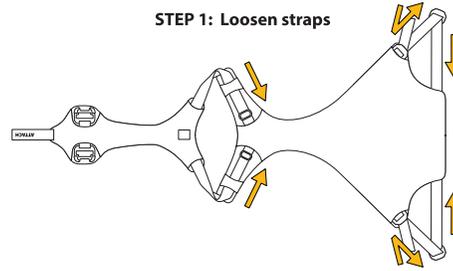


STEP 2: Place over head

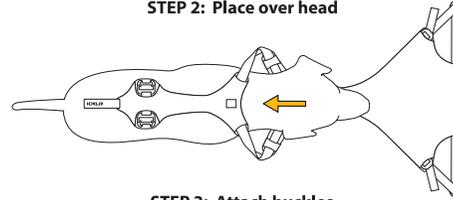


STEP 3: Attach buckles

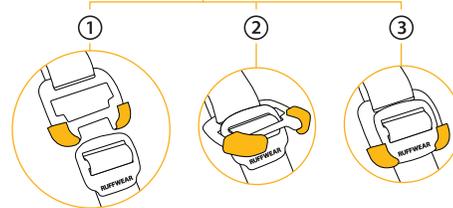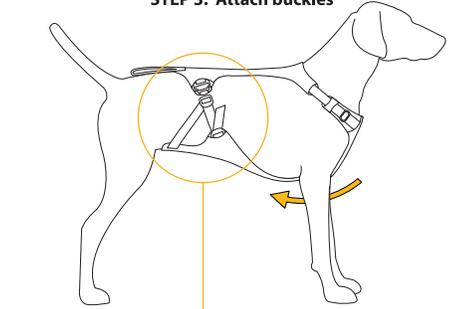

STEP 4: Tighten straps



HOW TO SECURE HARNESS TO SEAT BELT

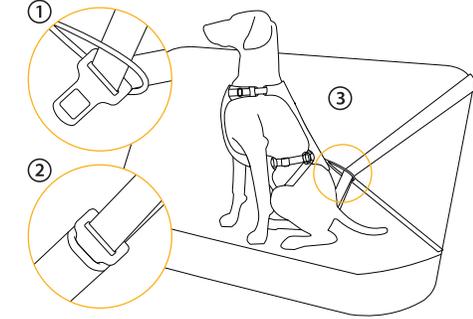

- 1 Pass seat belt through "ATTACH" loop
- 2 Click tab portion of seat belt into buckle
- 3 Tighten to remove slack from seat belt

IMPORTANT: Secure the seat belt to only the "ATTACH" loop. Do not secure seat belt to any other point on the harness.

CARE INSTRUCTIONS & STORAGE

- Secure fasteners
- Hand wash - mild detergent
- Air dry away from direct sunlight
- Store in a dry, dark place
- Do not bleach
- Do not iron
- Do not dry clean
- Always check harness for damage before use

INSPECTION & LIFESPAN

Inspect your harness for signs of damage and wear before and after each use. It is vitally important that the harness be in good condition. A damaged harness must be retired immediately. Retire the harness immediately if:

- There is any kind of rip or hole in the webbing
- The webbing is burnt, singed, or melted
- There are any torn threads, or heavy abrasion to the webbing
- Bar tacks are abraded or showing wear
- One of the buckles is cracked, corroded, has a burr, or is damaged or deformed in any way
- The webbing is faded from exposure to ultraviolet light
- A dog has chewed on any part of the harness

If you have any doubts about the dependability of the harness, retire it and get a new one. If you retire the harness, destroy it to prevent future use.

RUFFWEAR GUARANTEE: Ruffwear fully guarantees all of our gear against defects in materials and craftsmanship. For support, please contact Ruffwear Customer Service.

LIMITATION OF DAMAGES: Ruffwear will not be responsible for any claims or liabilities beyond the scope of our Ruffwear Guarantee. No other warranties, expressed or implied, are made. User assumes all responsibility for proper use of product. Venue for any claim shall be in Deschutes County, Oregon, USA.



Customer Service

support@ruffwear.com
888-783-3932
2843 NW Lolo Drive
Bend, OR, USA 97701